


Steel band hanger suitable for suspension of all types of stationary pipes. Commonly used for sprinkler system pipelines. Supplied with knurled swivel nut to facilitates easy installation and vertical adjustment of the pipe post installation.

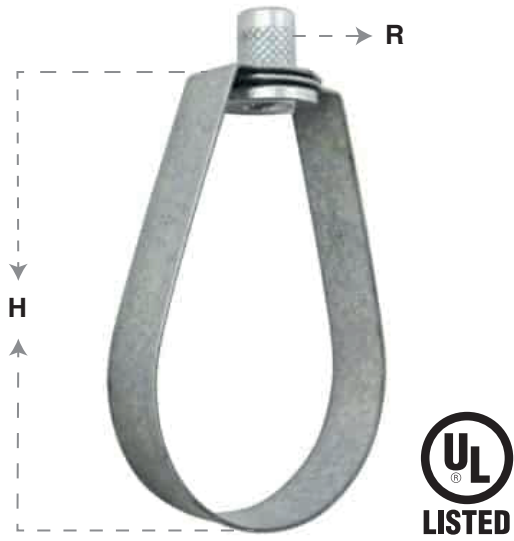

**Material :** Steel

**Finish :** Electrogalvanised post manufacture as standard.

**Options :** EPDM Lined (suffix 'R')

Hot Dip Galvanized finish (suffix 'HDG')

Zinc Flake finish (Suffix 'ZF')

Stainless Steel construction (suffix 'SS')

**Compliance :** US Standards MSS-SP58 & MSS-SP69 (Type 10)

Federal Specification : WW-H-171E & A-A-1192A (Type 10)

**Electro-Galvanized :** finish as per ASTM B633 SC3

BS1706 FE/ZN12.

**Underwriter's Laboratories (UL)**

Listed for sizes 3/4" to 8"

**Product Features:**

Sprinkler pipe hanger consist of a piece of mild steel shaped to support pipes.

Gives double steel thickness at the support location.

SELECTION TABLE FOR G-FIX SPRINKLER PIPE HANGERS (UL LISTED)					
Model	Steel Nominal		Material Dimension (mm)	Hanger Rod Size (R)	Max Load (kg)
	In	mm	Height (H)		
GFSH 3/4" (27mm)	3/4"	20	61	M10	220
GFSH 1" (34mm)	1"	25	70	M10	220
GFSH 1 1/4" (42mm)	1 1/4"	32	78	M10	220
GFSH 1 1/2" (48mm)	1 1/2"	40	84	M10	220
GFSH 2" (60mm)	2"	50	102	M10	220
GFSH 2 1/2" (73mm)	2 1/2"	65	118	M10	300
GFSH 3" (89mm)	3"	80	144	M10	300
GFSH 4" (114mm)	4"	100	176	M10	300
GFSH 5" (141mm)	5"	125	195	M12	550
GFSH 6" (168mm)	6"	150	262	M12	550
GFSH 8" (219mm)	8"	200	305	M12	1300

\*\*\* Product specifications are subject to change without prior notice.