

# O'Pro Classic

ELECTRIC WATER HEATER EQUIPPED WITH O'PRO EXCLUSIVE ANTI-CORROSIVE SYSTEM



## + PRODUCT

### COMFORT

- Elegant design
- Control knob on the bottom of the tank
- Flat thermometer

### QUALITY - DURABILITY

- Long tank lifetime thanks to O'Pro exclusive anti-corrosive system
- Magnesium anode for strengthened tank protection
- New generation diamond-quality enamel (glass-lined inner tank)
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around flange

### USER-FRIENDLINESS

- IP 24 or 25 - full compliance with European standards for electrical safety and user protection
- Heating light indicator


### SAVINGS

- Mechanical thermostat with integrated security
- High-efficiency water inlet
- CFC-free high-density insulation for more energy savings

## ENERGY-SAVING WATER HEATER

50 TO 100 L  
(HORIZONTAL WALL-MOUNTED)

50 TO 100 L  
(VERTICAL WALL-MOUNTED)




Model available\*

WARRANTY  
5 YEARS

Warranty



Anti-corrosive  
technology



Copper heating element



Gulf Technical Regulation  
on Low Voltage Electrical  
Equipment and Appliances


GCC energy regulation




علامة الجودة الإماراتية  
Emirates Quality Mark

\*Model types: A: Vertical wall-mounted / B: Horizontal wall-mounted / C: Floor-standing

# O'Pro Classic

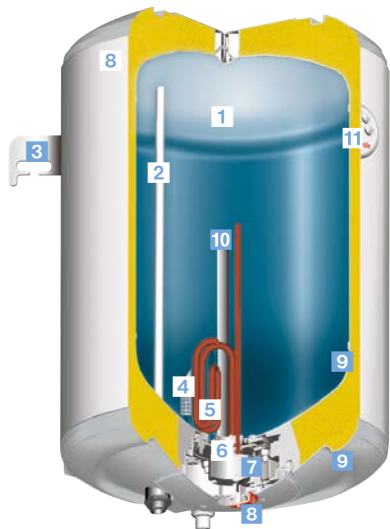


- 1 Diamond-quality enamel (glass-lined inner tank)
- 2 Optimised stainless steel outlet pipe
- 3 Hanging jig
- 4 Inlet diffuser
- 5 Sheathed immersion heating element
- 6 O'Pro anit-corrosive system
- 7 Dielectric union
- 8 Thermostat
- 9 High-density insulation foam
- 10 Magnesium anode
- 11 External thermometer




O'Pro exclusive anti-corrosive system balances out the electrical potential of the tank and immersion heating element. Thus, the magnesium anode life is considerably increased and protection against corrosion is reinforced.

## INSTALLATION DIMENSIONS

Horizontal wall-mounted

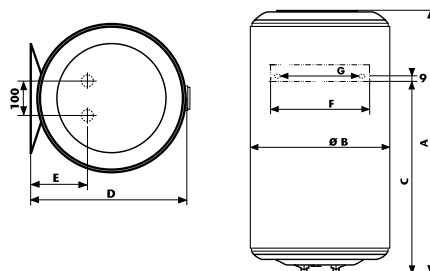

Vertical wall-mounted

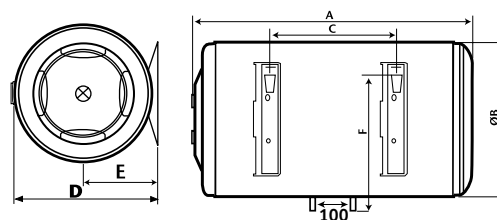

## TECHNICAL DATA

CAPACITY (L)	OUTPUT (W)	VOLTAGE (V)	HEAT-UP TIME AT 60°C (ΔT=20°C)	HEAT-UP TIME AT 60°C (ΔT=50°C)	ENERGY CONSUMPTION (KWH/24H AT 65°C)
<b>O'Pro Classic Vertical wall-mounted</b>					
50	1500	230 (220/240)	0h48	1h53	0.913
80	1500	230 (220/240)	1h17	3h09	1.83
100	1500	230 (220/240)	1h36	3h48	1.55
<b>O'Pro Classic Horizontal wall-mounted</b>					
50	1500	230 (220/240)	0h39	1h38	0.945
80	1500	230 (220/240)	1h03	2h38	1.216
100	1500	230 (220/240)	1h26	3h36	1.67

## DIMENSIONS

CAPACITY (L)	DIMENSIONS (mm)							FLANGE OPENING (Ø) mm	NET WEIGHT (Kg)	ESMA ENERGY EFFICIENCY
	A	B	C	D	E	F	G			
<b>O'Pro Classic Vertical wall-mounted</b>										
50	612	433	380	451	165	300	240	72	16	★★★★★
80	859	433	590	451	165	300	240	72	20	★★★★★
100	1021	433	740	451	165	300	240	72	22	★★★★★
<b>O'Pro Classic Horizontal wall-mounted</b>										
50	596	433	160	451	234	343	-	72	15	★★★★★
80	843	433	335	451	234	343	-	72	21	★★★★★
100	1005	433	510	451	234	343	-	72	24	★★★★★

IP 24 - IP 25  
Horizontal Vertical